



BI-ENERGY








Diesel
32,5 kW



Single-phase
Electric motor
230 VAC - 2,2 kW



Three-phase
Electric motor
400 VAC - 5,5 kW

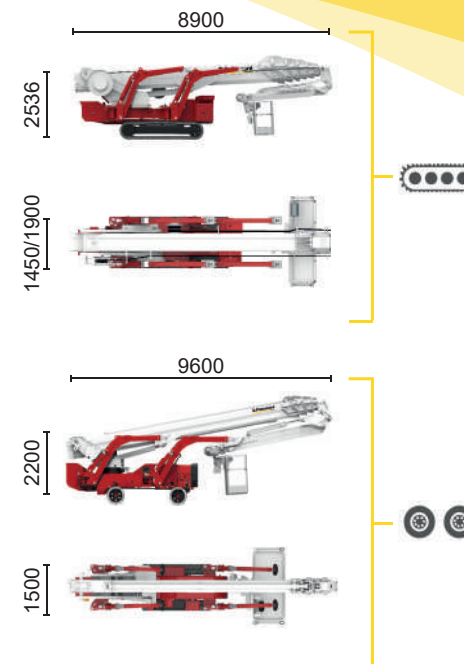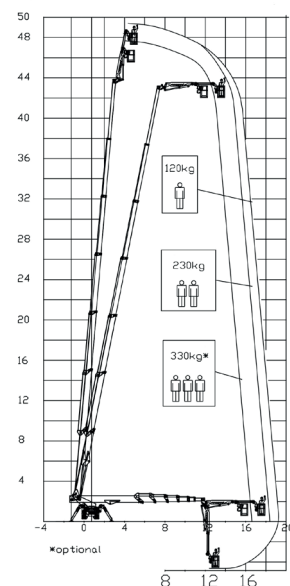

14,5 m	18,5 m	19,5 m	12,5 m	16,5 m	L1	L2	W1	W2	W3
330 kg*	230 kg	120 kg	330 kg*	120/230 kg	6460 mm	7190 mm	5170 mm	4655 mm	4130 mm



XTJ 48.1+/C	49 m	19,5 m	330 kg*	660°	240x70 cm	90°+80°	4,13-5,17 m	16%	42%	1,2 km/h	14980 kg	95 kN	4,48 kN/m2	7,01 kN/m2
XTJ 48.1+/R	49 m	19,5 m	330 kg*	660°	240x70 cm	90°+80°	4,13-5,17 m	16%	21%	1 km/h	14980 kg	95 kN	4,48 kN/m2	6,50 kN/m2

Available power options:

ECO (AC+BATTERY)

The technical data may deviate +/- 3 % from the specified values.

Characteristics and technical data are informative only and subjected to change without notice.

Palazzani Industrie S.p.A.

Via del Pavione, 4 - 25050 - Paderno F.C. (BS) - Italy

Tel. (+39) 0306857073

info@palazzani.it

www.palazzani.it



NC 949 A 24