

SP X 5 3 2



REMOTE CONTROL



- Multifunctional
- Proportional
- LCD Screen
- Spare battery
- Alarm & error diagnostic



HYDRAULIC JIB

- Hook or winch mode
- 1 ton MAX capacity
- 17,3 m MAX height
- Stored on board & easy to install





SPECIAL FEATURES

- 400 kg Pick&Carry
- **Virtual Walls**
- **Self-diagnostic system**
- All accessories on board
- Variable displacement pump

WINCH



- 800 kg single line
- Up to 125 m rope
- Single line up to 4 falls
- Pulley heads and pulley



- block on board


OUTRIGGERS

- 1250 different configurations
- 4 independent stability areas
- Self-levelling system





MAIN BOOM



- 3,2 tons MAX capacity
- 12 m MAX height
- 4 hydraulic extension by chain
- High-resistance steel
- Hook & winch mode

360° ENDLESS ROTATION

LITHIUM BATTERY POWERED





- 48 V, 210 Ah
 - Can operate while charging at 220 V
- Three-phase 7 kW electric motor
- 400 V external battery charger

TRACKS

- White or black tracks
 - 45° hydraulically extendible







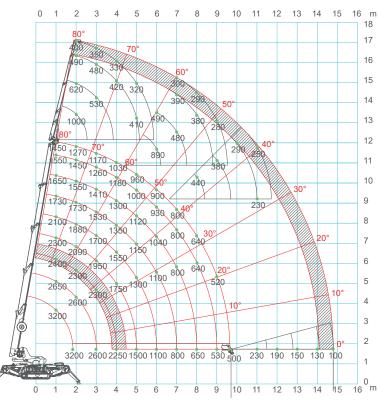

	Kg
SPX532	2520
Hydraulic Jib	210
Winch	52
Electric Power Unit	63



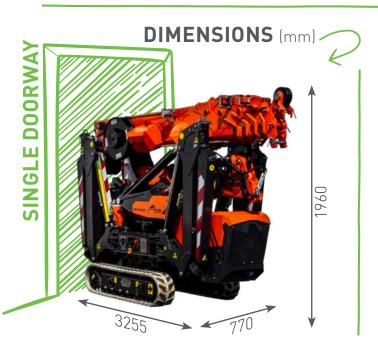

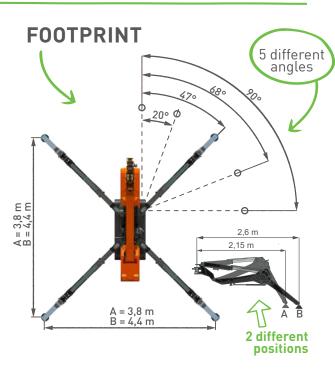

ACCESSORIES

